


SIZE	RATING	VALVE DIMENSIONS							MOUNTING FLANGE DETAIL				
		А	H1	H2	H3	L	ØD	FLANGE STANDARD	FACING	PCD-1	PCD	HOLE DIA	NO. OF HOLES
DN-40	PN16	33	57	125	60	182	40.5	IS:1538/ BS:4505	RAISED FACE	126	50	7	4
DN-50	PN16	43	62	120	60	182	50.5	IS:1538/ BS:4505	RAISED FACE	145	50	7	4
DN-65	PN16	46	72	130	60	182	65	IS:1538/ BS:4505	RAISED FACE	160	50	7	4
DN-80	PN16	46	76	140	60	182	80	IS:1538/ BS:4505	RAISED FACE	180	50	7	4
DN-100	PN16	52	95	160	60	182	100	IS:1538/ BS:4505	RAISED FACE	210	50	7	4
DN-125	PN16	56	114	170	60	182	123	IS:1538/ BS:4505	RAISED FACE	240	70	10	4
DN-150	PN16	56	126	190	60	182	148.5	IS:1538/ BS:4505	RAISED FACE	275	70	10	4
DN-200	PN16	60	1 <mark>6</mark> 1	230	60	182	197	IS:1538/ BS:4505	RAISED FACE	295	70	10	4
DN-250	PN16	68	215	280	60	182	250.5	IS:1538/ BS:4505	RAISED FACE	358	102	12	4
DN-300	PN16	78	230	310	60	182	299.5	IS:1538/ BS:4505	RAISED FACE	429	102	12	4

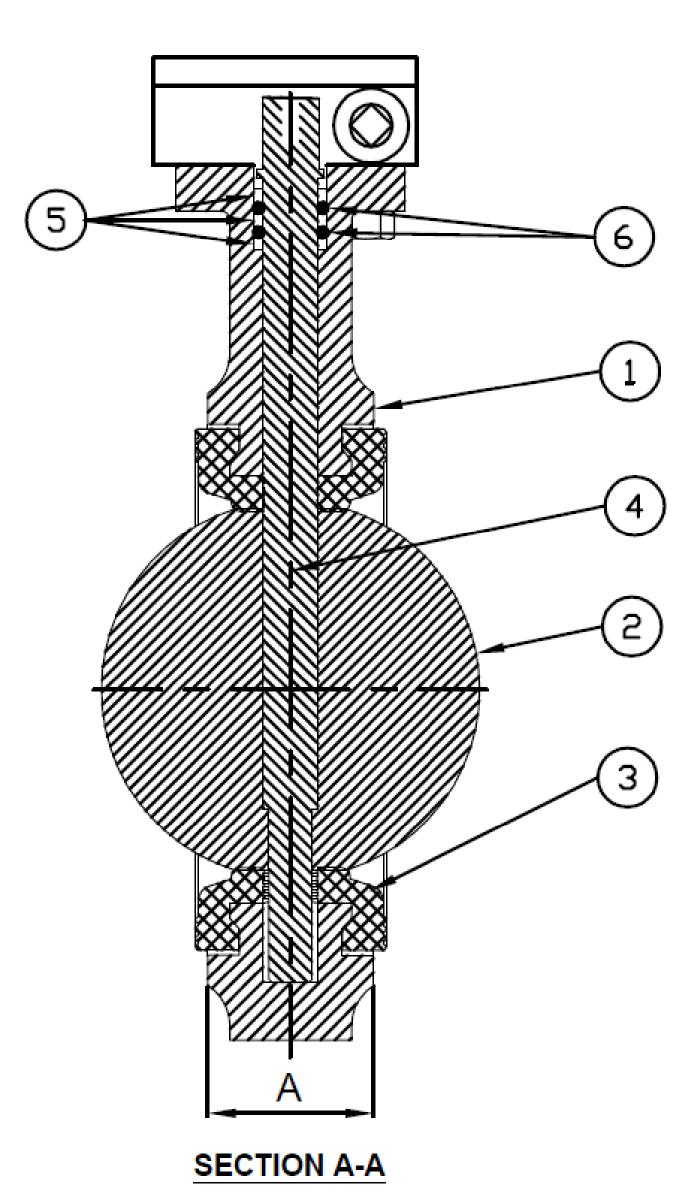

PARTS DETAIL :-					
S No.	PART NAME	MATERIAL	QTY.		
1	BODY	CI	1		
2	DISC	SS-316	1		
3	LINER	EPDM	1		
4	STEM	AST A 276, GR SS410	1		
5	BUSH	PTFE / NYLON	3		
6	O-RINGS	EPDM	2		
7	FASTNER	SS / MS	4		

HYDROSTATIC TEST PRESSURE				
BODY (Kgf/cm2)	SEAT (Kgf/cm2)			
24	17.6			

Due to Continuous Development we reserve the rights to change in dimensions & Design keeping standard specification same.

SKS valves

CLIENT		
P.O./ENQ. NO.		
Model:	SKS116S6G	
GAD No. :	19BFDT0004-01	
Face to Face :	BFCONCENTRIC	$\oplus \square$
Valve Type :		SCALE N.T.S
Operator:	Gearbox	
		SHEET 1 OF 1