
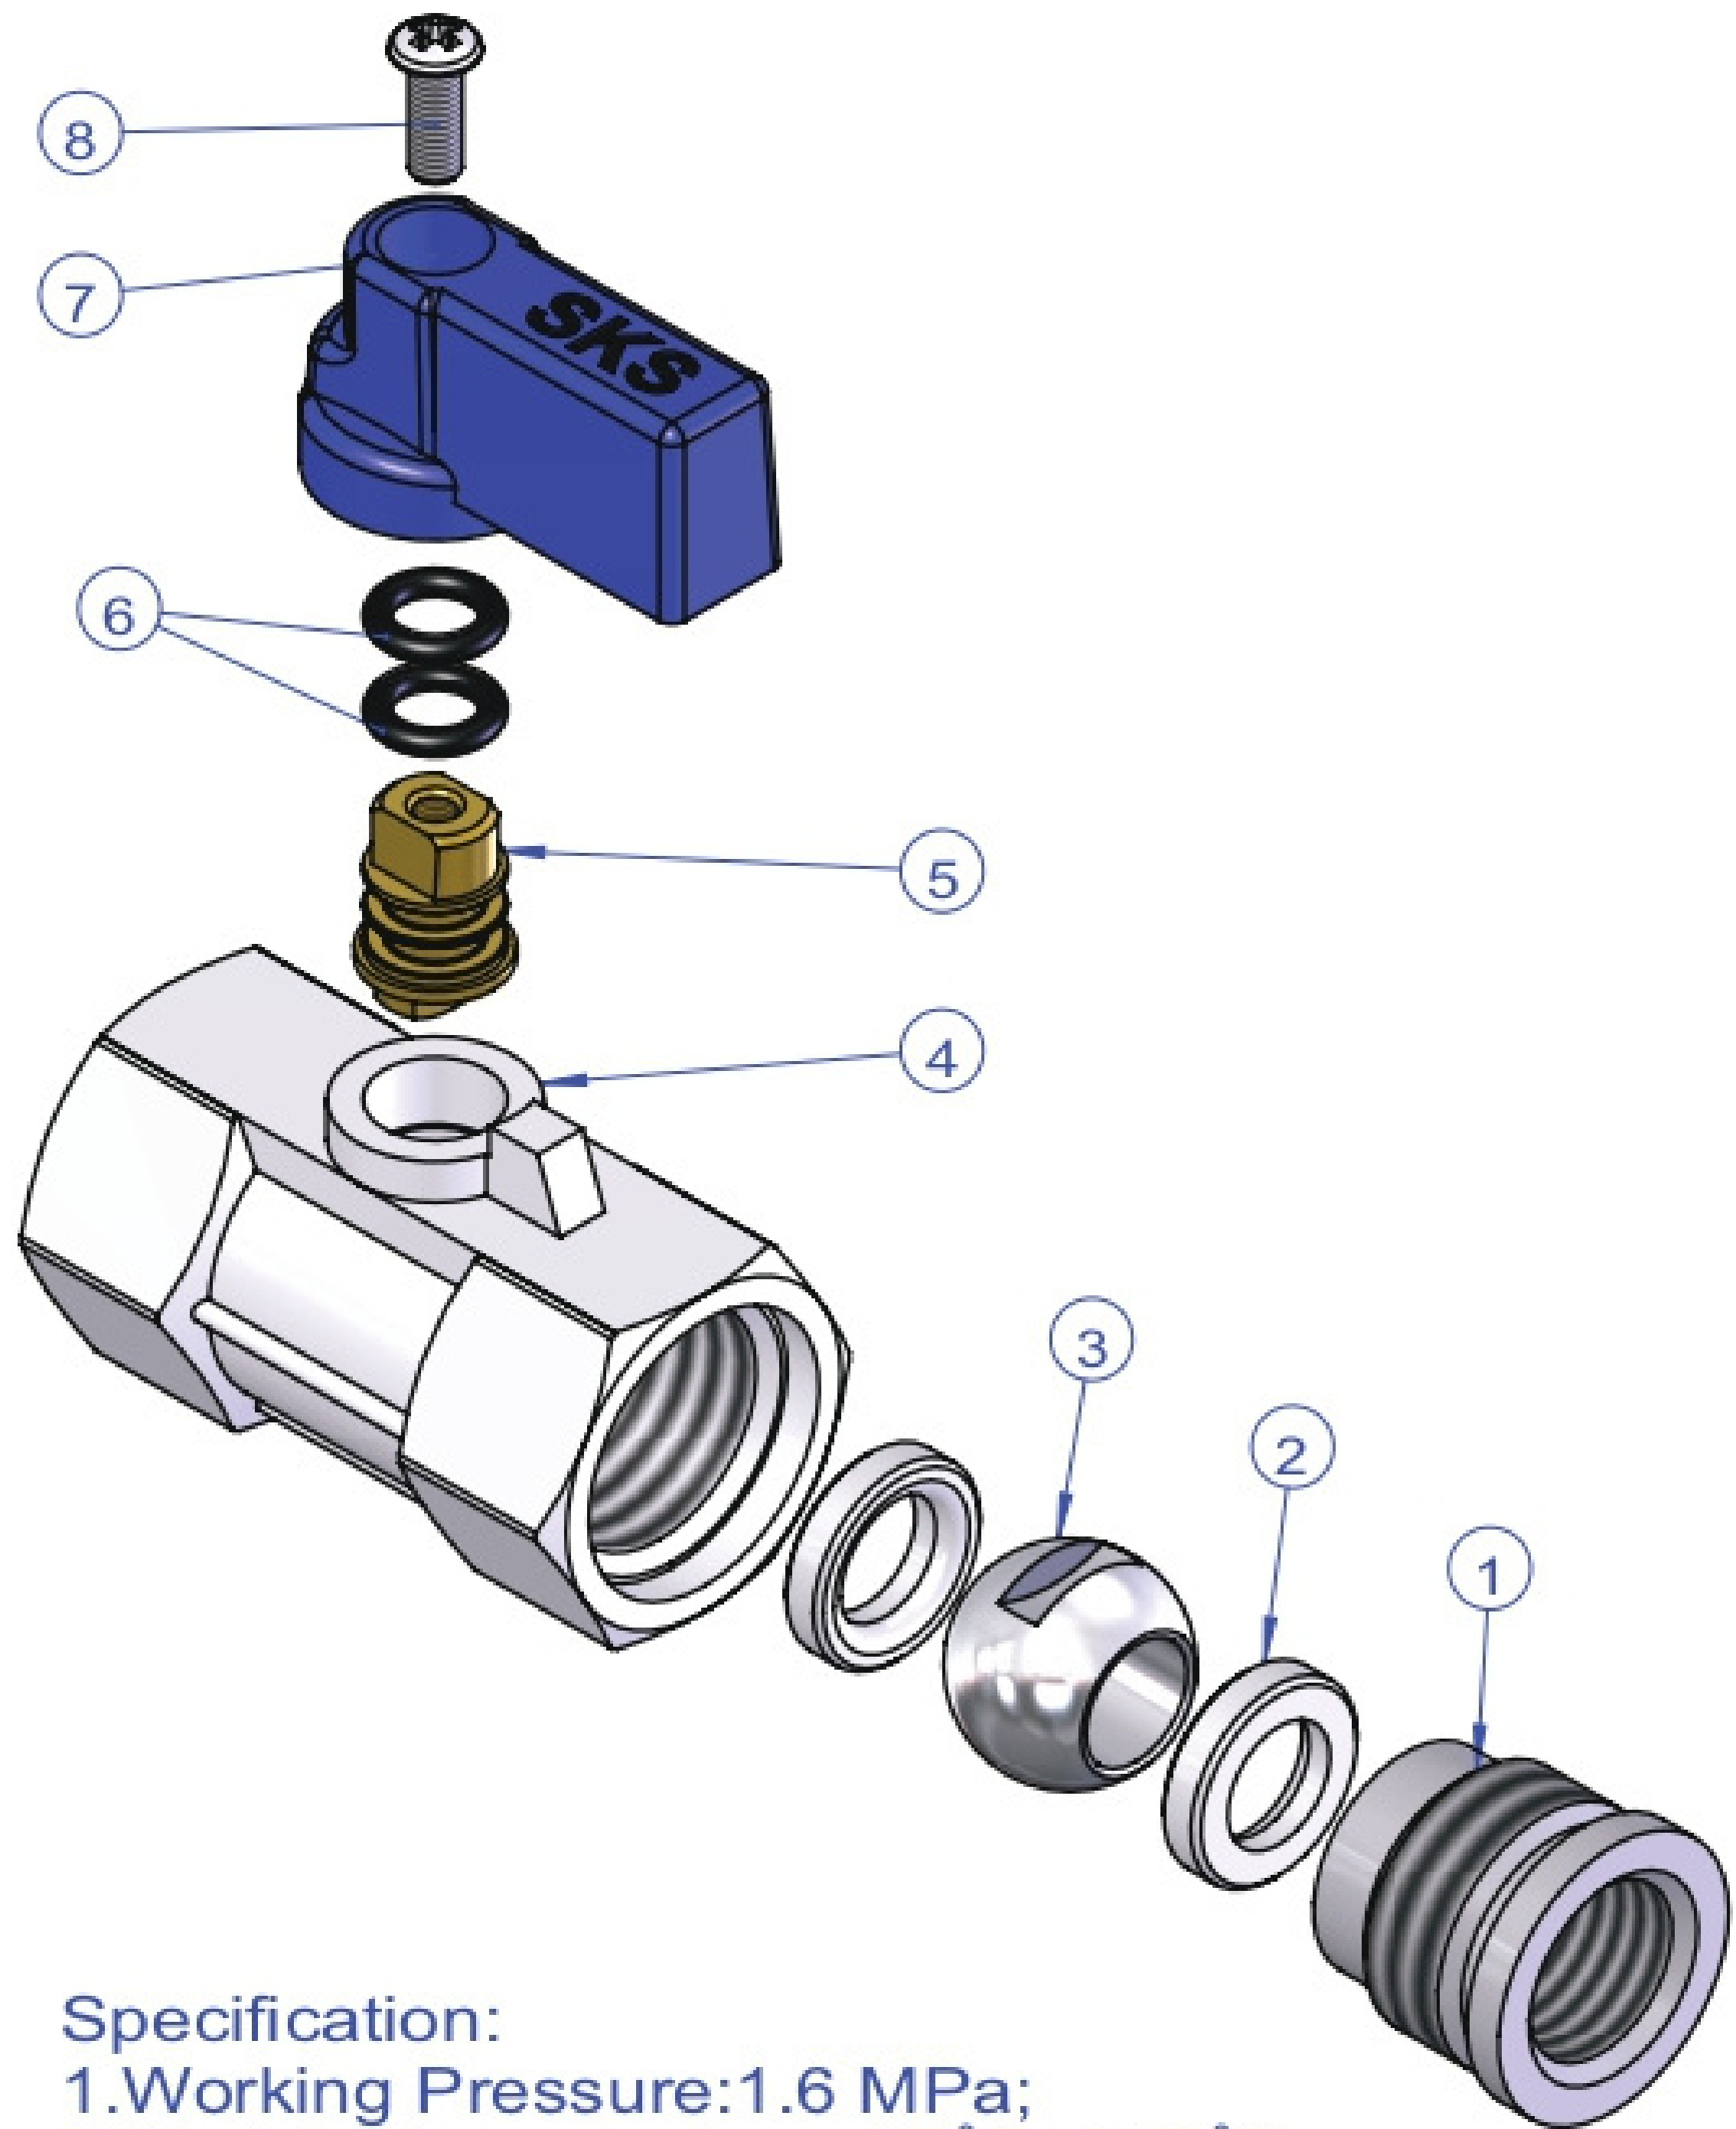
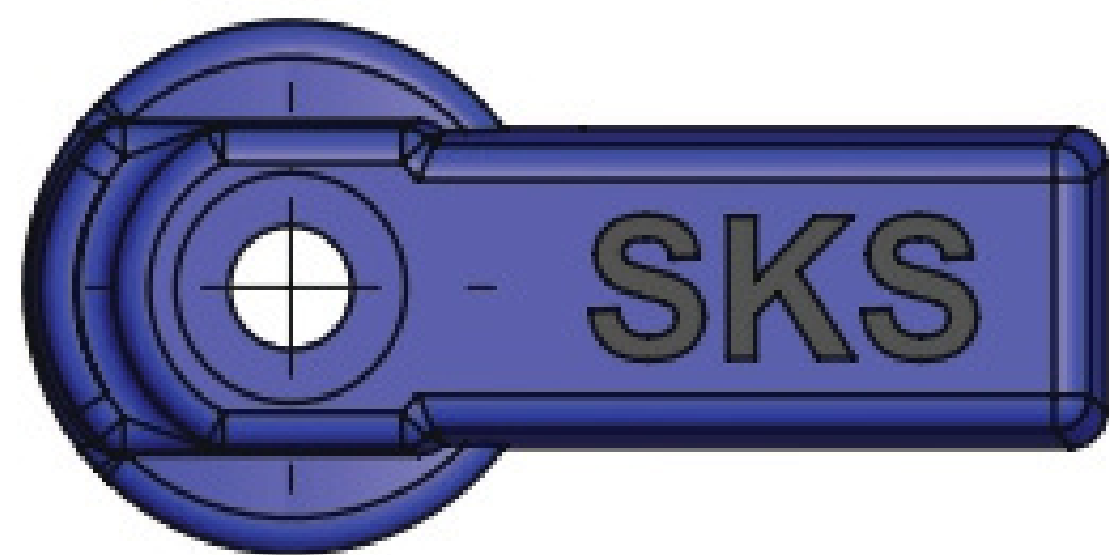
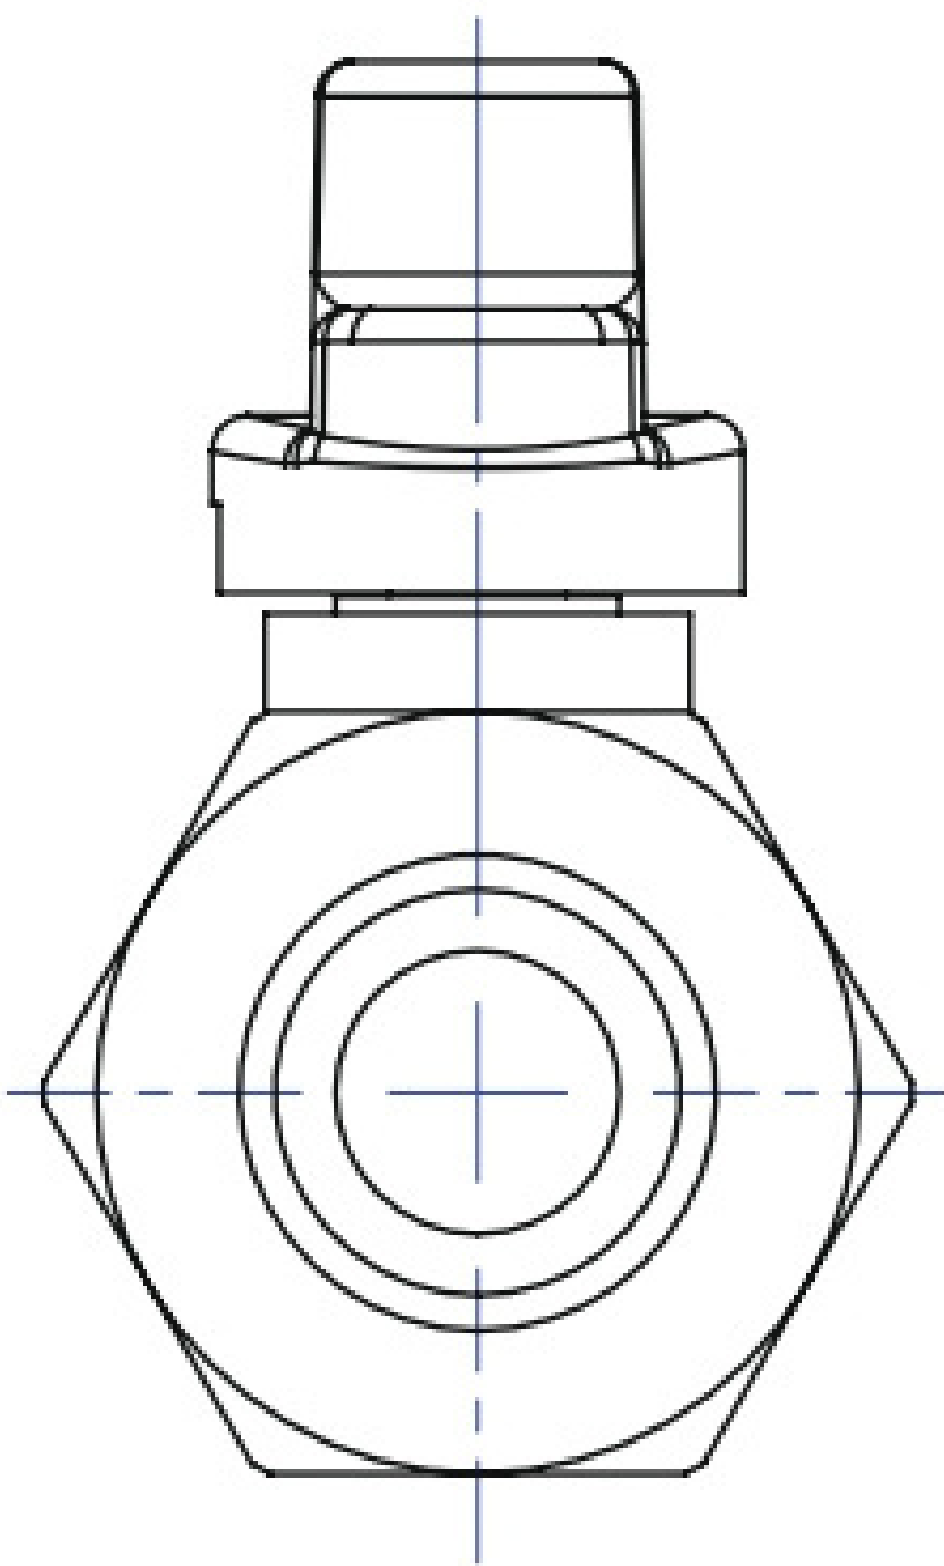


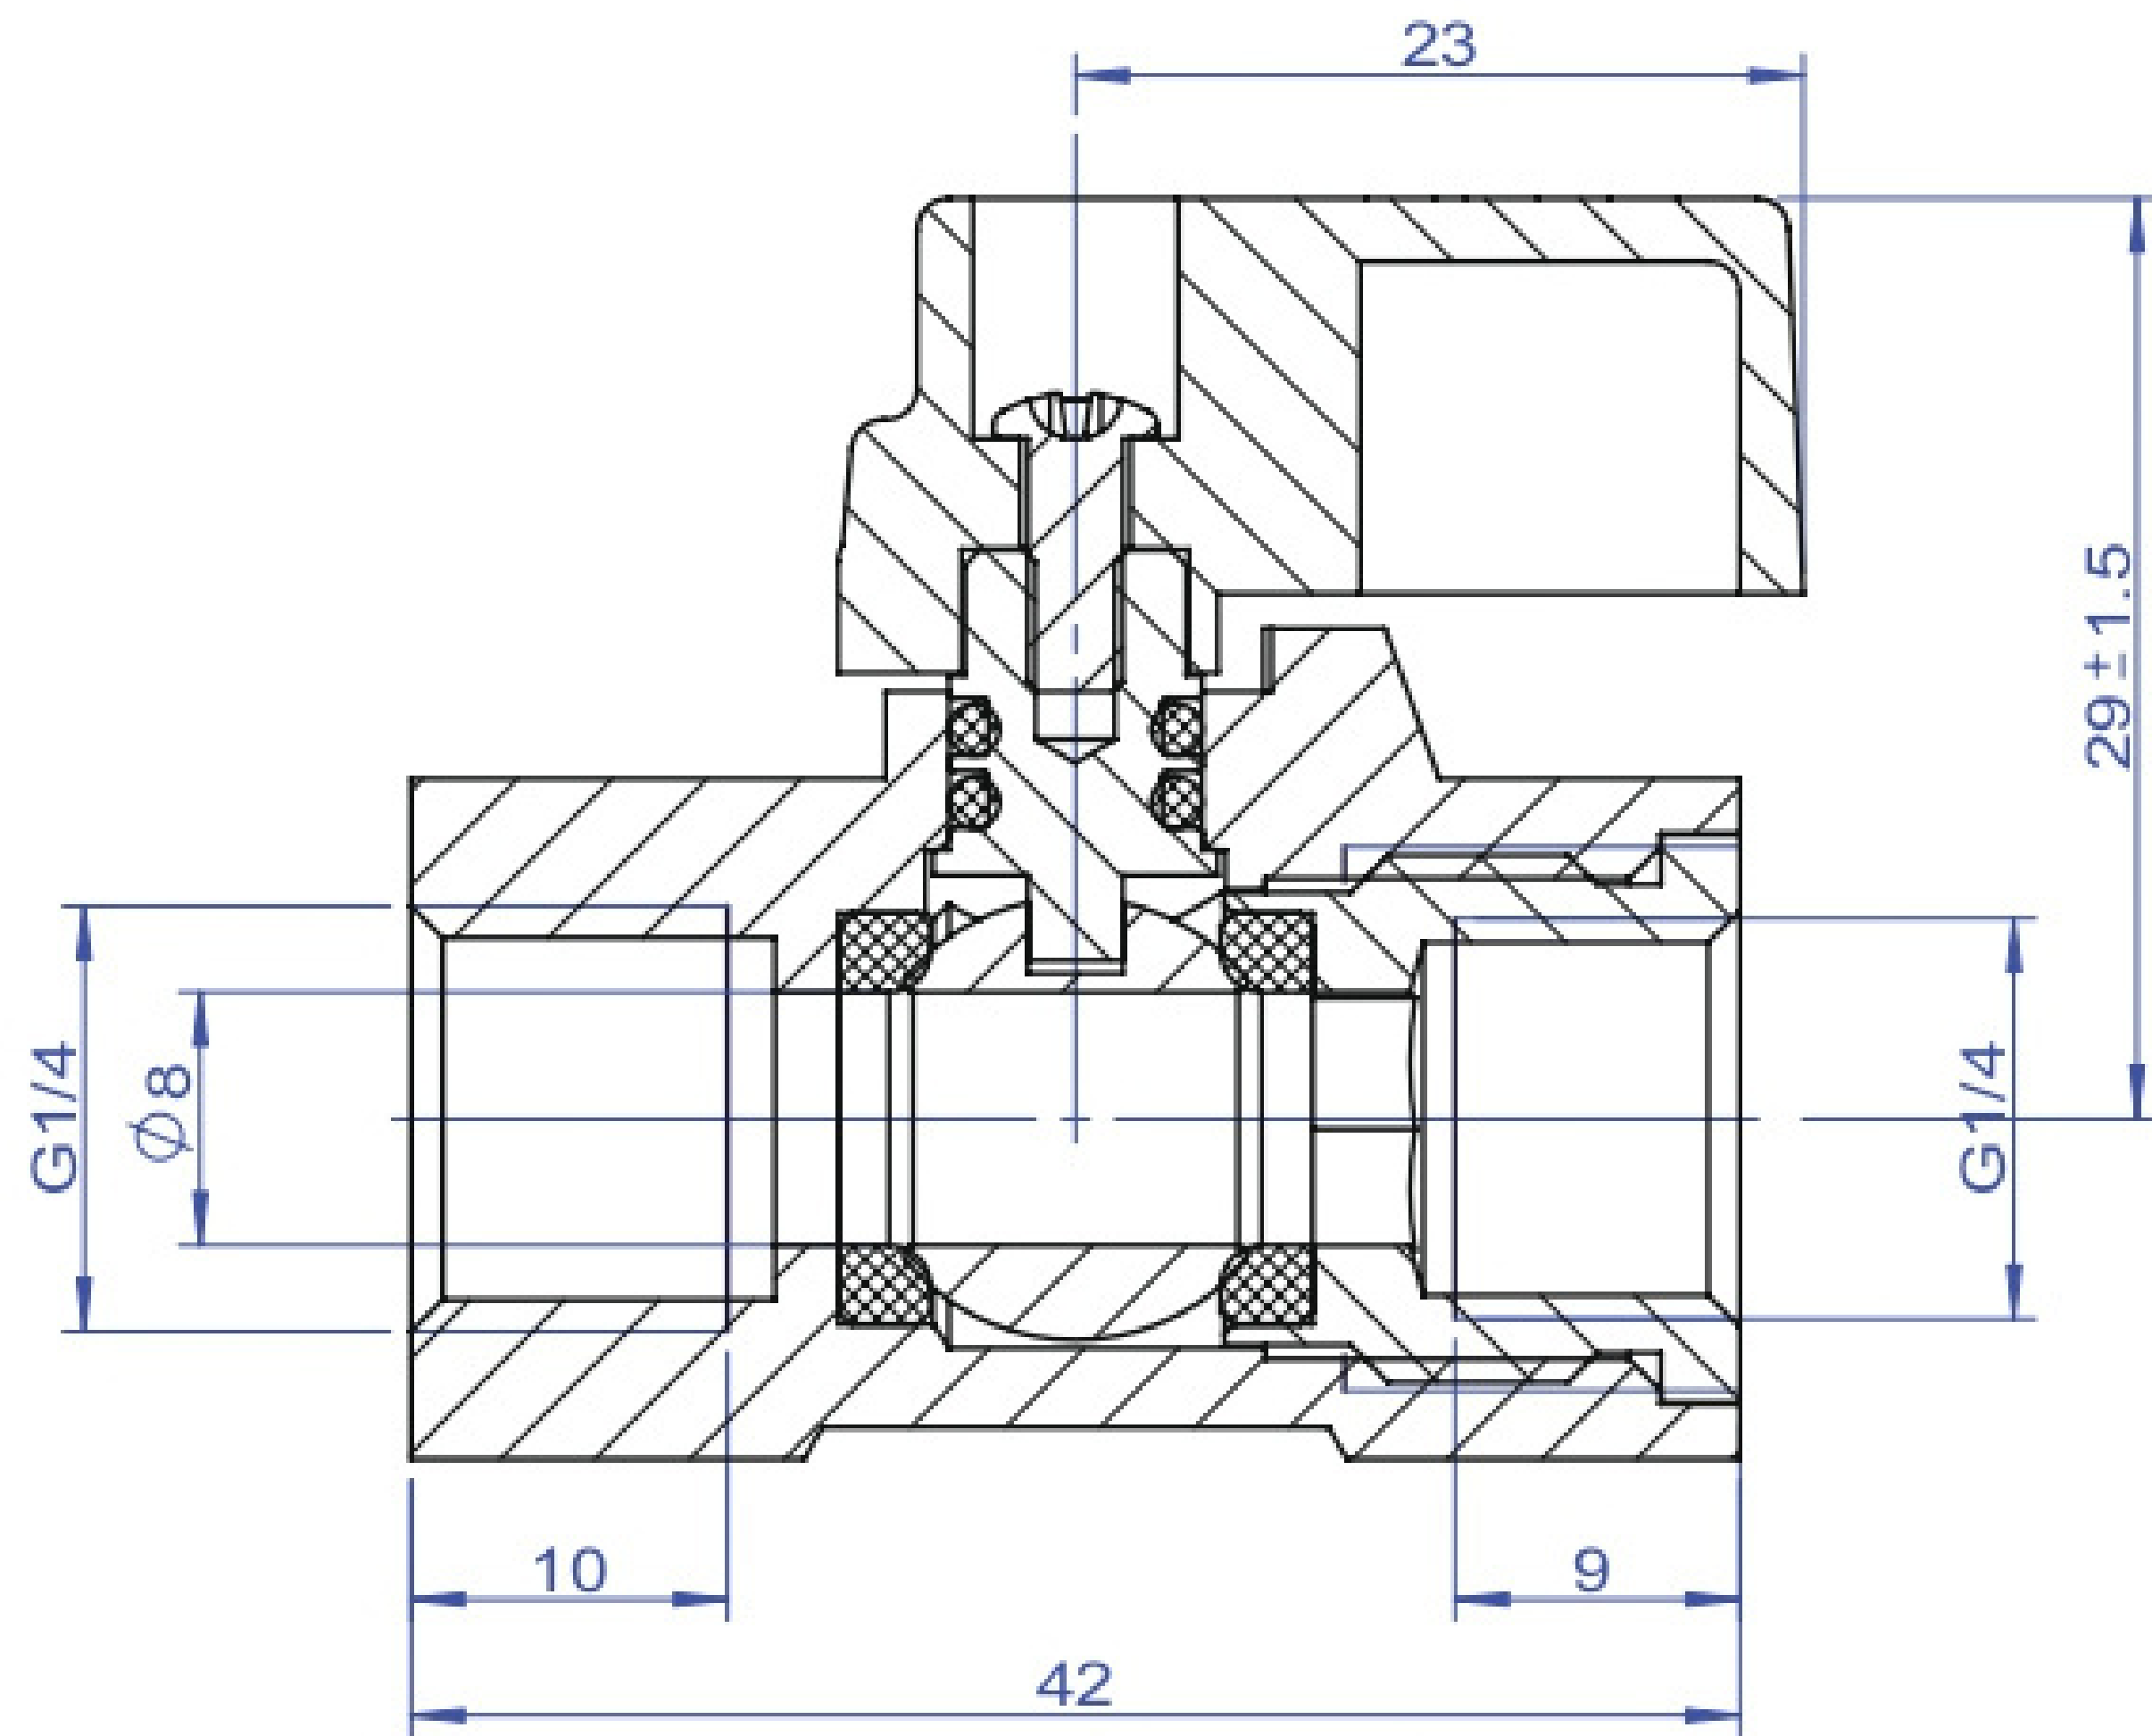

Specification:
1.Working Pressure:1.6 MPa;
2.Working temperature:-10 °C~110 °C;
3.Surface:Nickel-plated.

Number	Name	Material	Quantity
1	Locking nut	Brass(Cu≥57% Pb≤3.5% Fe≤0.8%) with Nickel plated	1
2	Seal	PTFE	2
3	Ball	Brass(Cu≥57% Pb≤3.5% Fe≤0.8%) with Chrome plated	1
4	Body	Brass (Cu≥57% Pb≤2.8% Fe≤0.8%) with Nickel plated	1
5	Stem	Brass Cu≥57% Pb≤3.5% Fe≤0.8%	1
6	O-ring	NBR	2
7	Handle	Aluminum alloy Surface paint RAL 9017 and Words is white color	1
8	Screw	Steel Q235 with Zn plating	1

Mark	Times	Modification NO	Modification content	Signature	Date
------	-------	-----------------	----------------------	-----------	------

TOLERANCE OF DIMENSIONS AND GEOMETRY UNLESS OTHERWISE SPECIFIED				
DIMENSION GB/T1804-m		ANGLE	PLUMB	CONCENTRICITY
≤6	±0.1	±1°	±0.1	Ø0.3
>6≤30	±0.2			
>30≤120	±0.3			
>120≤400	±0.5			
DESIGN		L L		2013.07.31
CHECKED		XGW		2013.07.31
PROCESSOR		LWF		2013.07.31
STANDARDIZATION		YSY		2013.07.31
APPROVED		YSY		2013.07.31

PRODUCT TYPE:	1500
TITLE:	Assembly drawing 1/4"
ART.	SKS.511

DWG.NO.				EDITION	
2150002				A	
PROJECTION MEANS	PRIMO ANGLE OF VIEW		DRAWING UNIT		mm
DESIGN SIGN	G.W	N.W.	SCALE		
S A B		102.4g	1.5:1		
PAGE 1 OF 1					
SKS VALVES					