
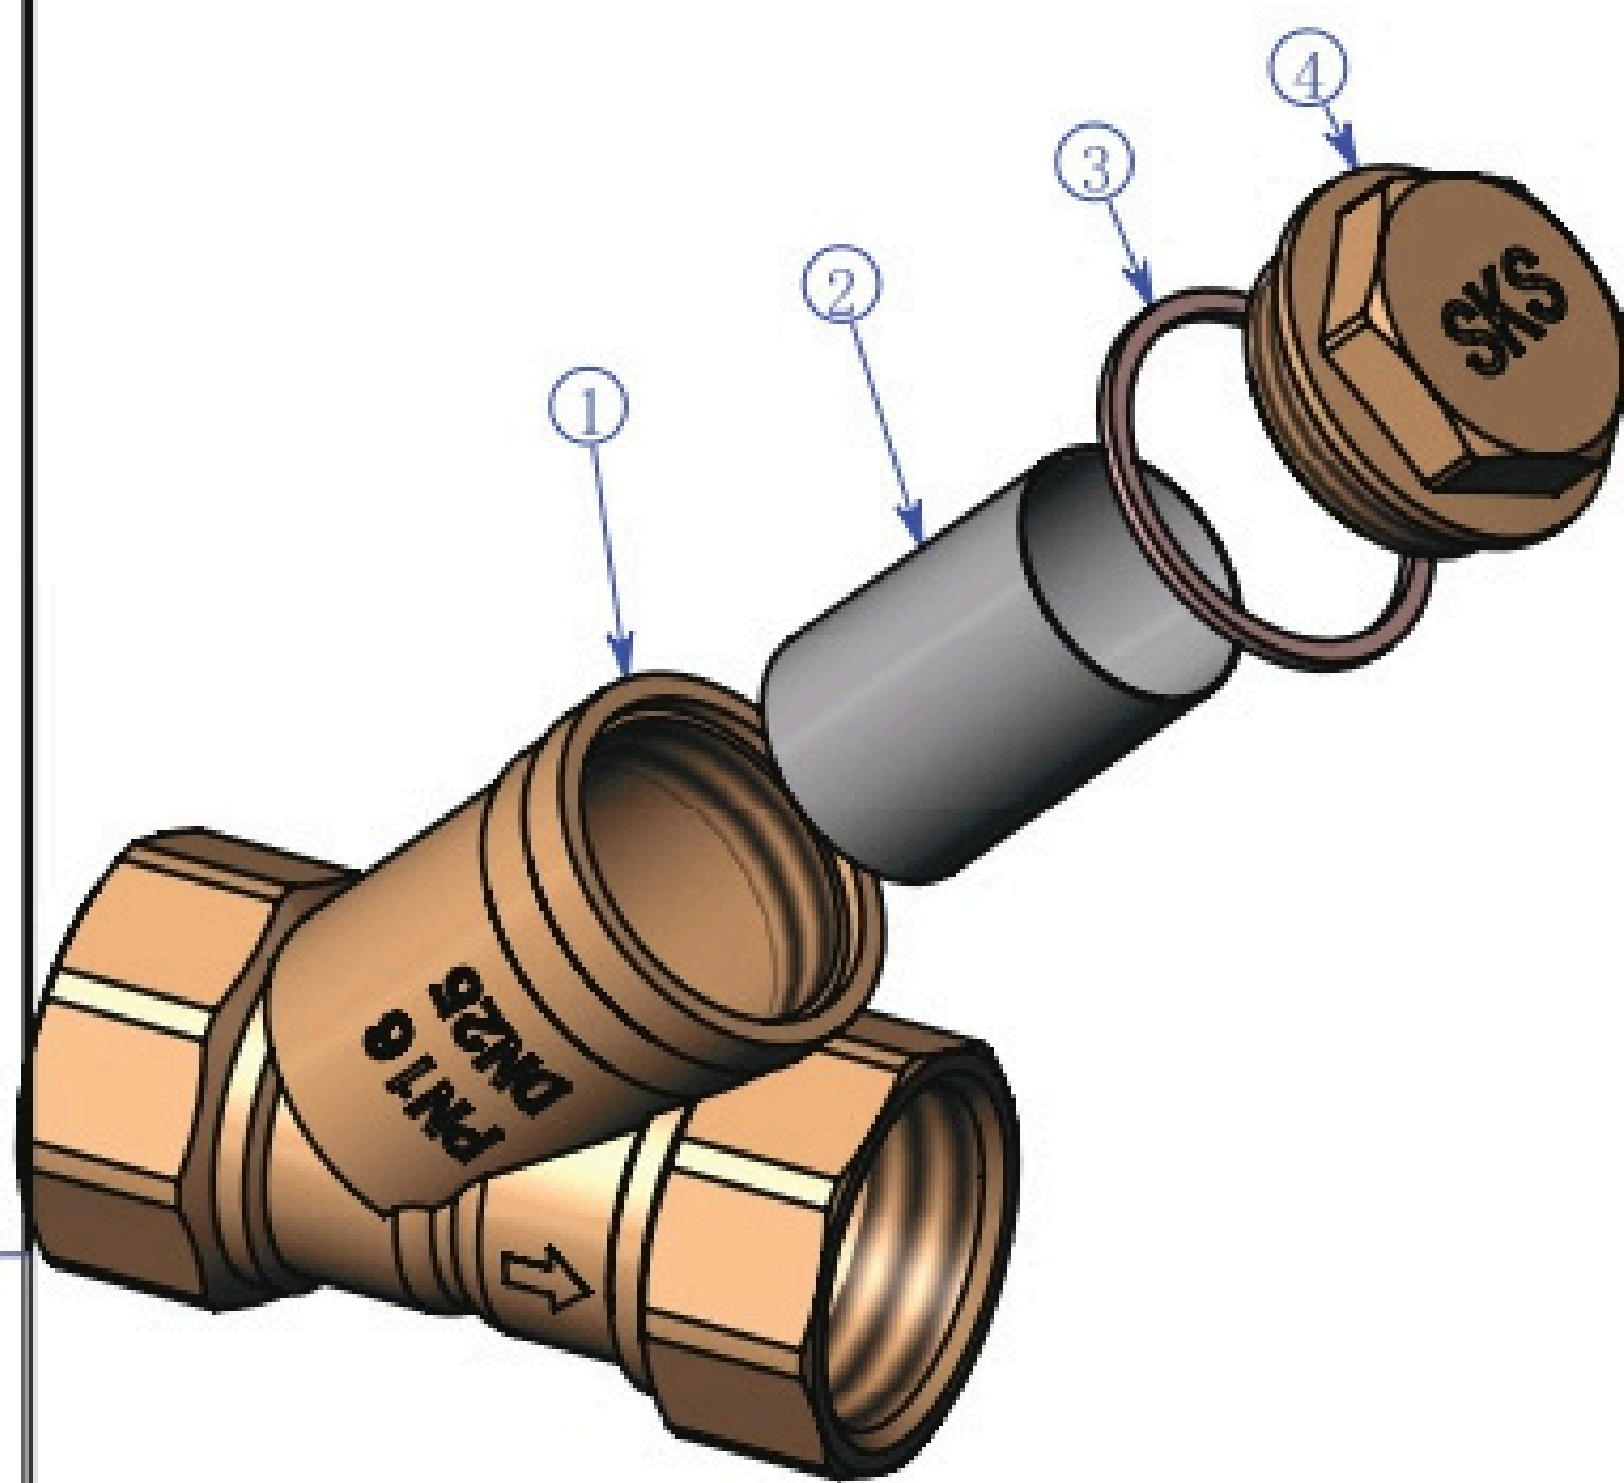


Size	DN	L	L1	L2	H	B	C	Weight (g)
G 3/8	Ø11	46	11.5	10	30	Ø18	29	95
G 1/2	Ø15	56.5	11.5	11	38.5	Ø18	29	140
G 3/4	Ø19	69	13	11	47.5	Ø24	35	205
G 1	Ø20.5	77	16.5	16.5	50	Ø24	35	300
G 1 1/4	Ø29.5	96.5	18	18	65	Ø35	52	580
G 1 1/2	Ø34	105	18.5	18.5	73.5	Ø42	58.5	800
G 2	Ø44	126	21	21	90	Ø53	69	1350
G 2 1/2	Ø54	133	18	18	106.5	Ø63	85	1950
G 3	Ø62	156.5	21	21	121.5	Ø74	98	2950
G 4	Ø87	180	25	25	148.5	Ø94	113	4800

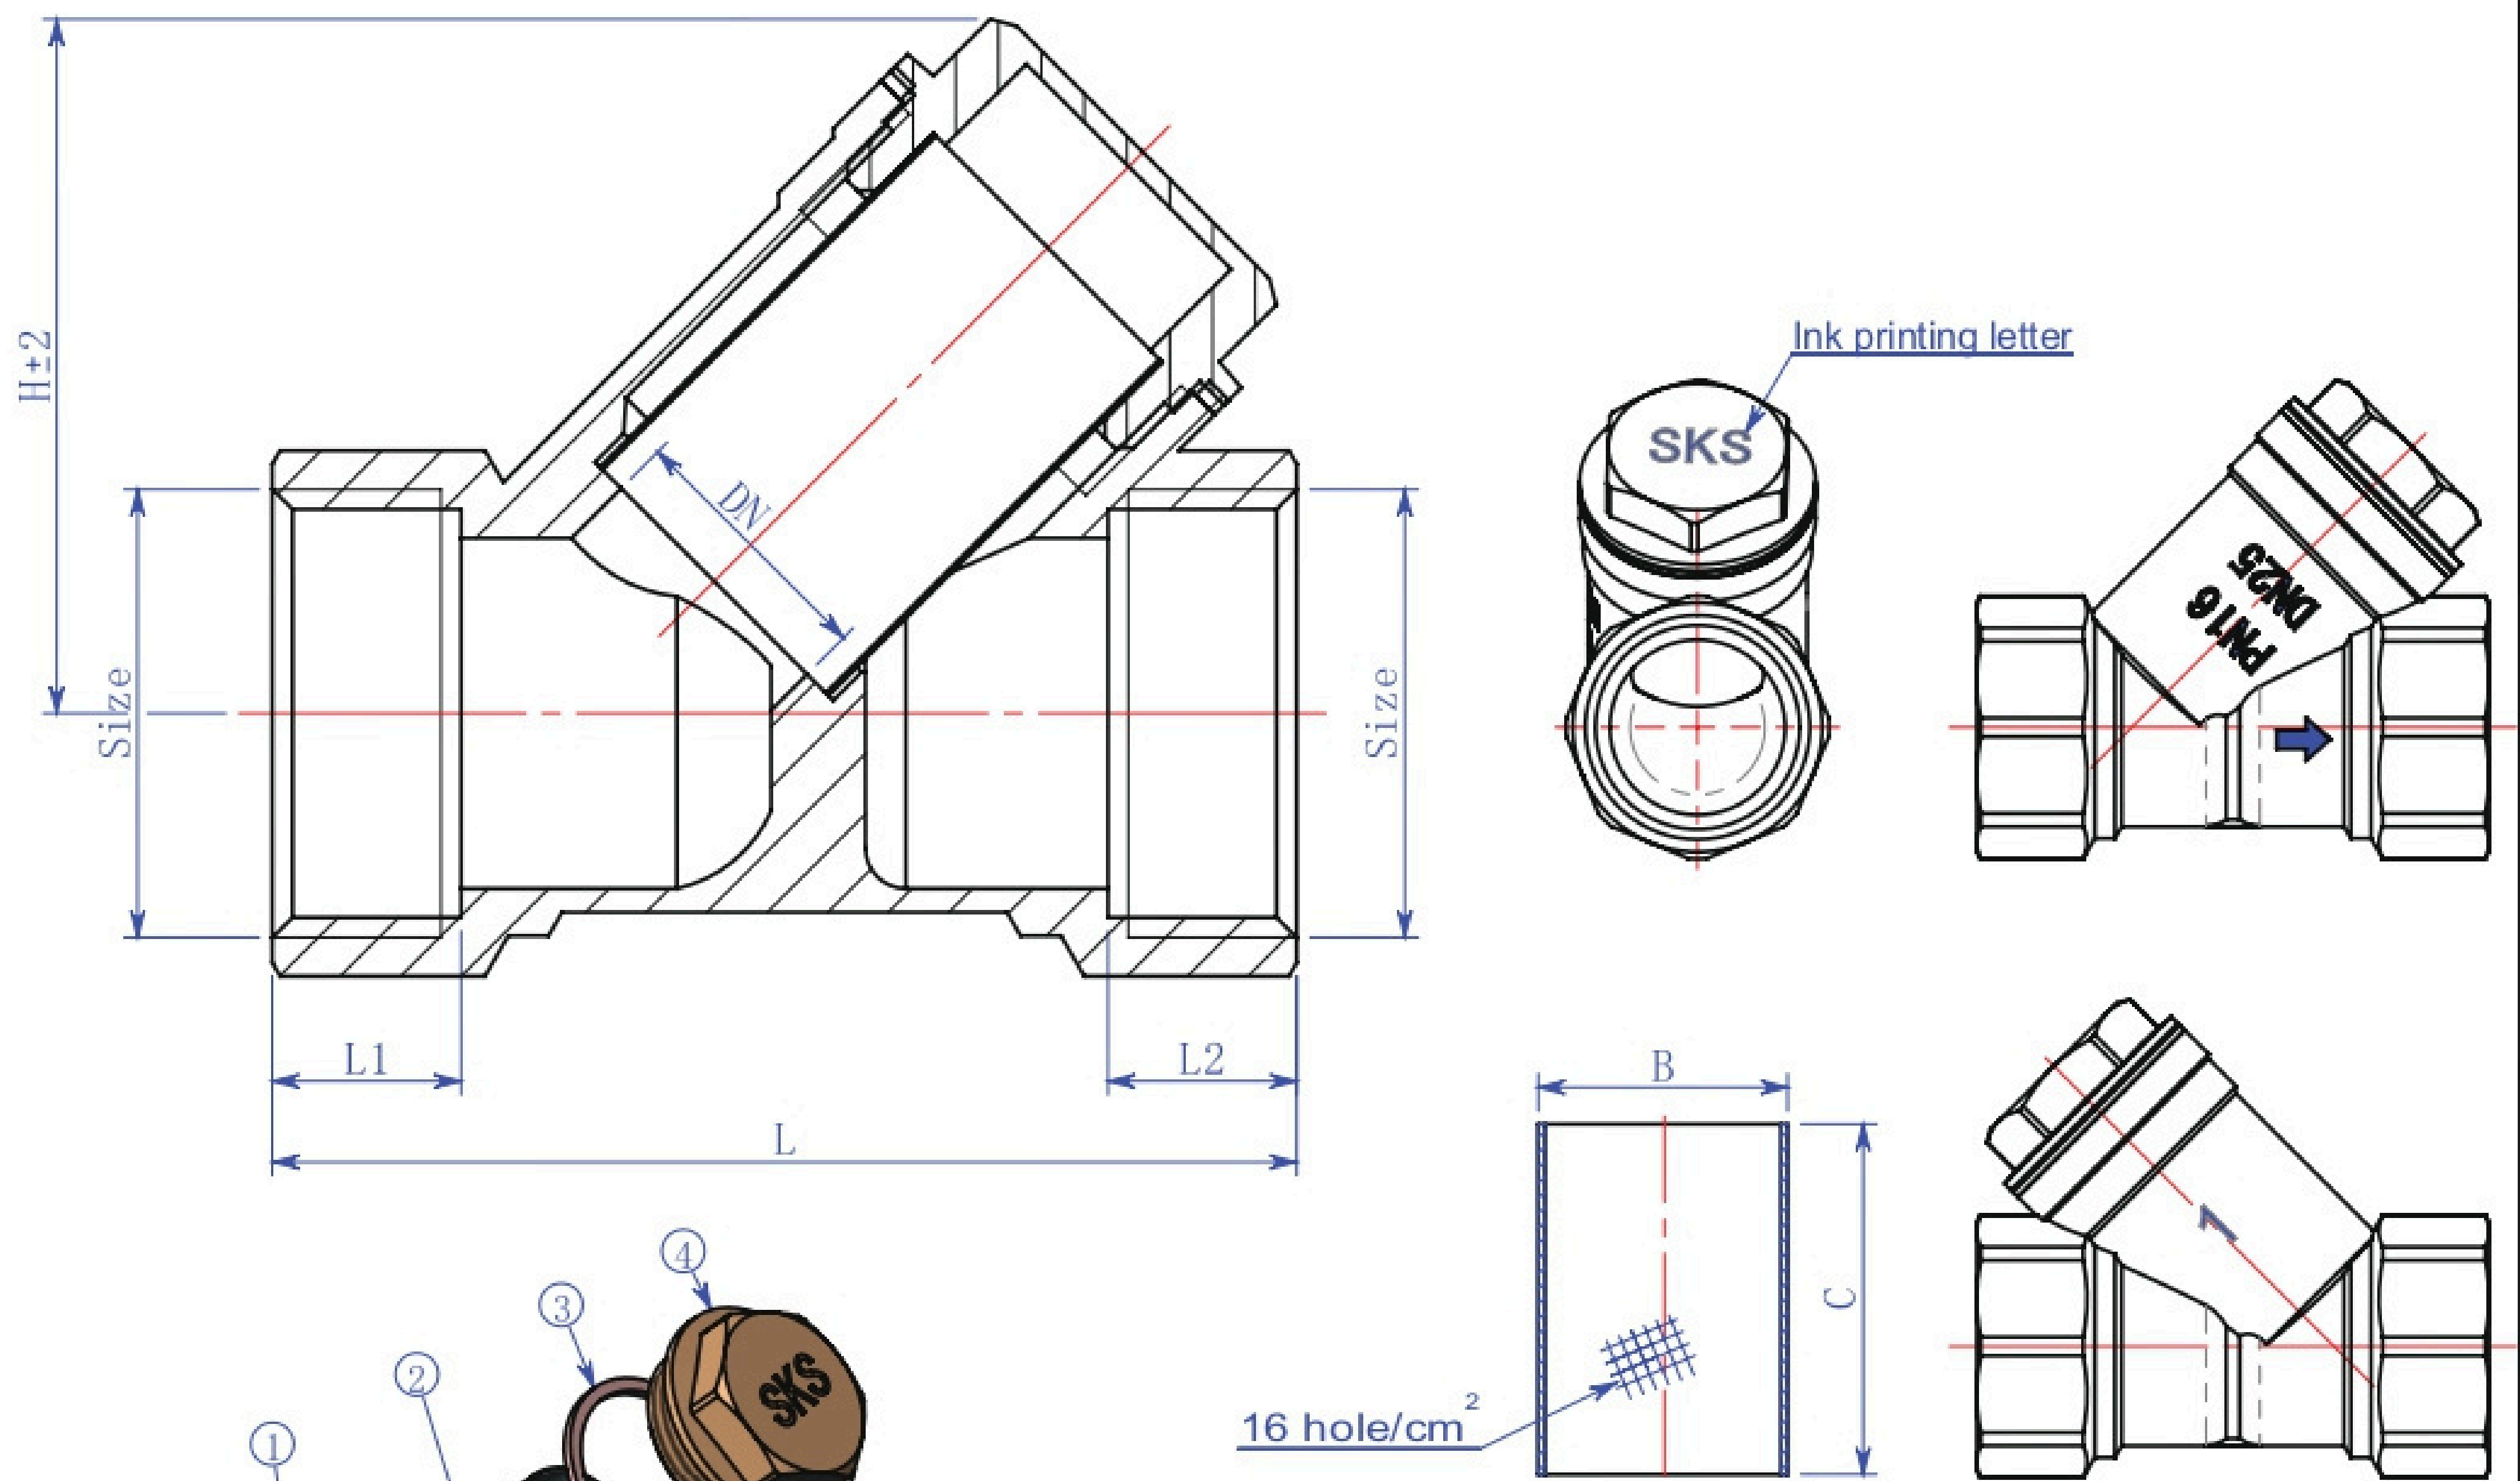

No.	Name	Material	QTY.
1	Body	3/8"-2 1/2" Brass (Cu > 57%, Pb < 3%, Fe < 0.8%) 3"-4" Brass (Cu > 57%, Pb < 3%, Fe < 1%)	1
2	Filter	Stainless steel	1
3	Washer	Klingerit	1
4	Bonnet	Brass (Cu > 57%, Pb < 3%, Fe < 0.8%)	1

Specification:  
 1. Working Pressure: 1.6 MPa;  
 2. Working temperature: -10°C ~ 80°C;  
 3. Surface: Nickel-plated.

TOLERANCE OF DIMENSIONS AND GEOMETRY UNLESS OTHERWISE SPECIFIED

DIMENSION GB/T1804-m	ANGLE	PLUMB	CONCENTRICITY
≤6	±0.1	±1°	Ø0.3
>6≤30	±0.2		
>30≤120	±0.3		
>120≤400	±0.5		
DESIGN	Radman	2013.07.31	
CHECKED	XGW	2013.07.31	
PROCESSOR	LWF	2013.07.31	
STANDARDIZATION	YSY	2013.07.31	
APPROVED	YSY	2013.07.31	

PRODUCT TYPE :	<b>3500</b>
TITLE :	<b>Y strainer Assembly drawing 3/8 " - 4 "</b>
ART.	<b>SKS.574</b>

DWG.NO.	<b>2350003</b>	EDITION	<b>A</b>
PROJECTION MEANS	PRIMO ANGLE OF VIEW	DRAWING UNIT	mm
DESIGN SIGN	G.W	N.W.	SCALE
S A B			<b>1:1</b>
PAGE OF			
<b>SKS VALVES</b>			

Customer drawing number