

SKS200 AUTOMATIC AIRVENT

	SKS200 AIRVENT
	Standard Automatic Airvent PN 10

Automatic Airvent Series SKS 200 are suitable to eliminate automatically air in heating systems the following characteristics :


Max Working Pressure :	10 bar
Max Discharge Pressure :	2.5 bar
Max Temperature of use :	110°C
Threading of connection :	ISO 228/1

AVAILABLE SIZES :
3/8" - 1/2", 3/4", 1"

List of Materials :

Metal of the Body :	Brass Alloy CW617N - UNI EN 12165
Metal of the Cap :	Brass Alloy CW617N - UNI EN 12165
Spring :	Stainless Steel
Float :	PP
Seals :	EPDM

MAIN SIZES OF SKS200 AUTOMATIC AIRVENT

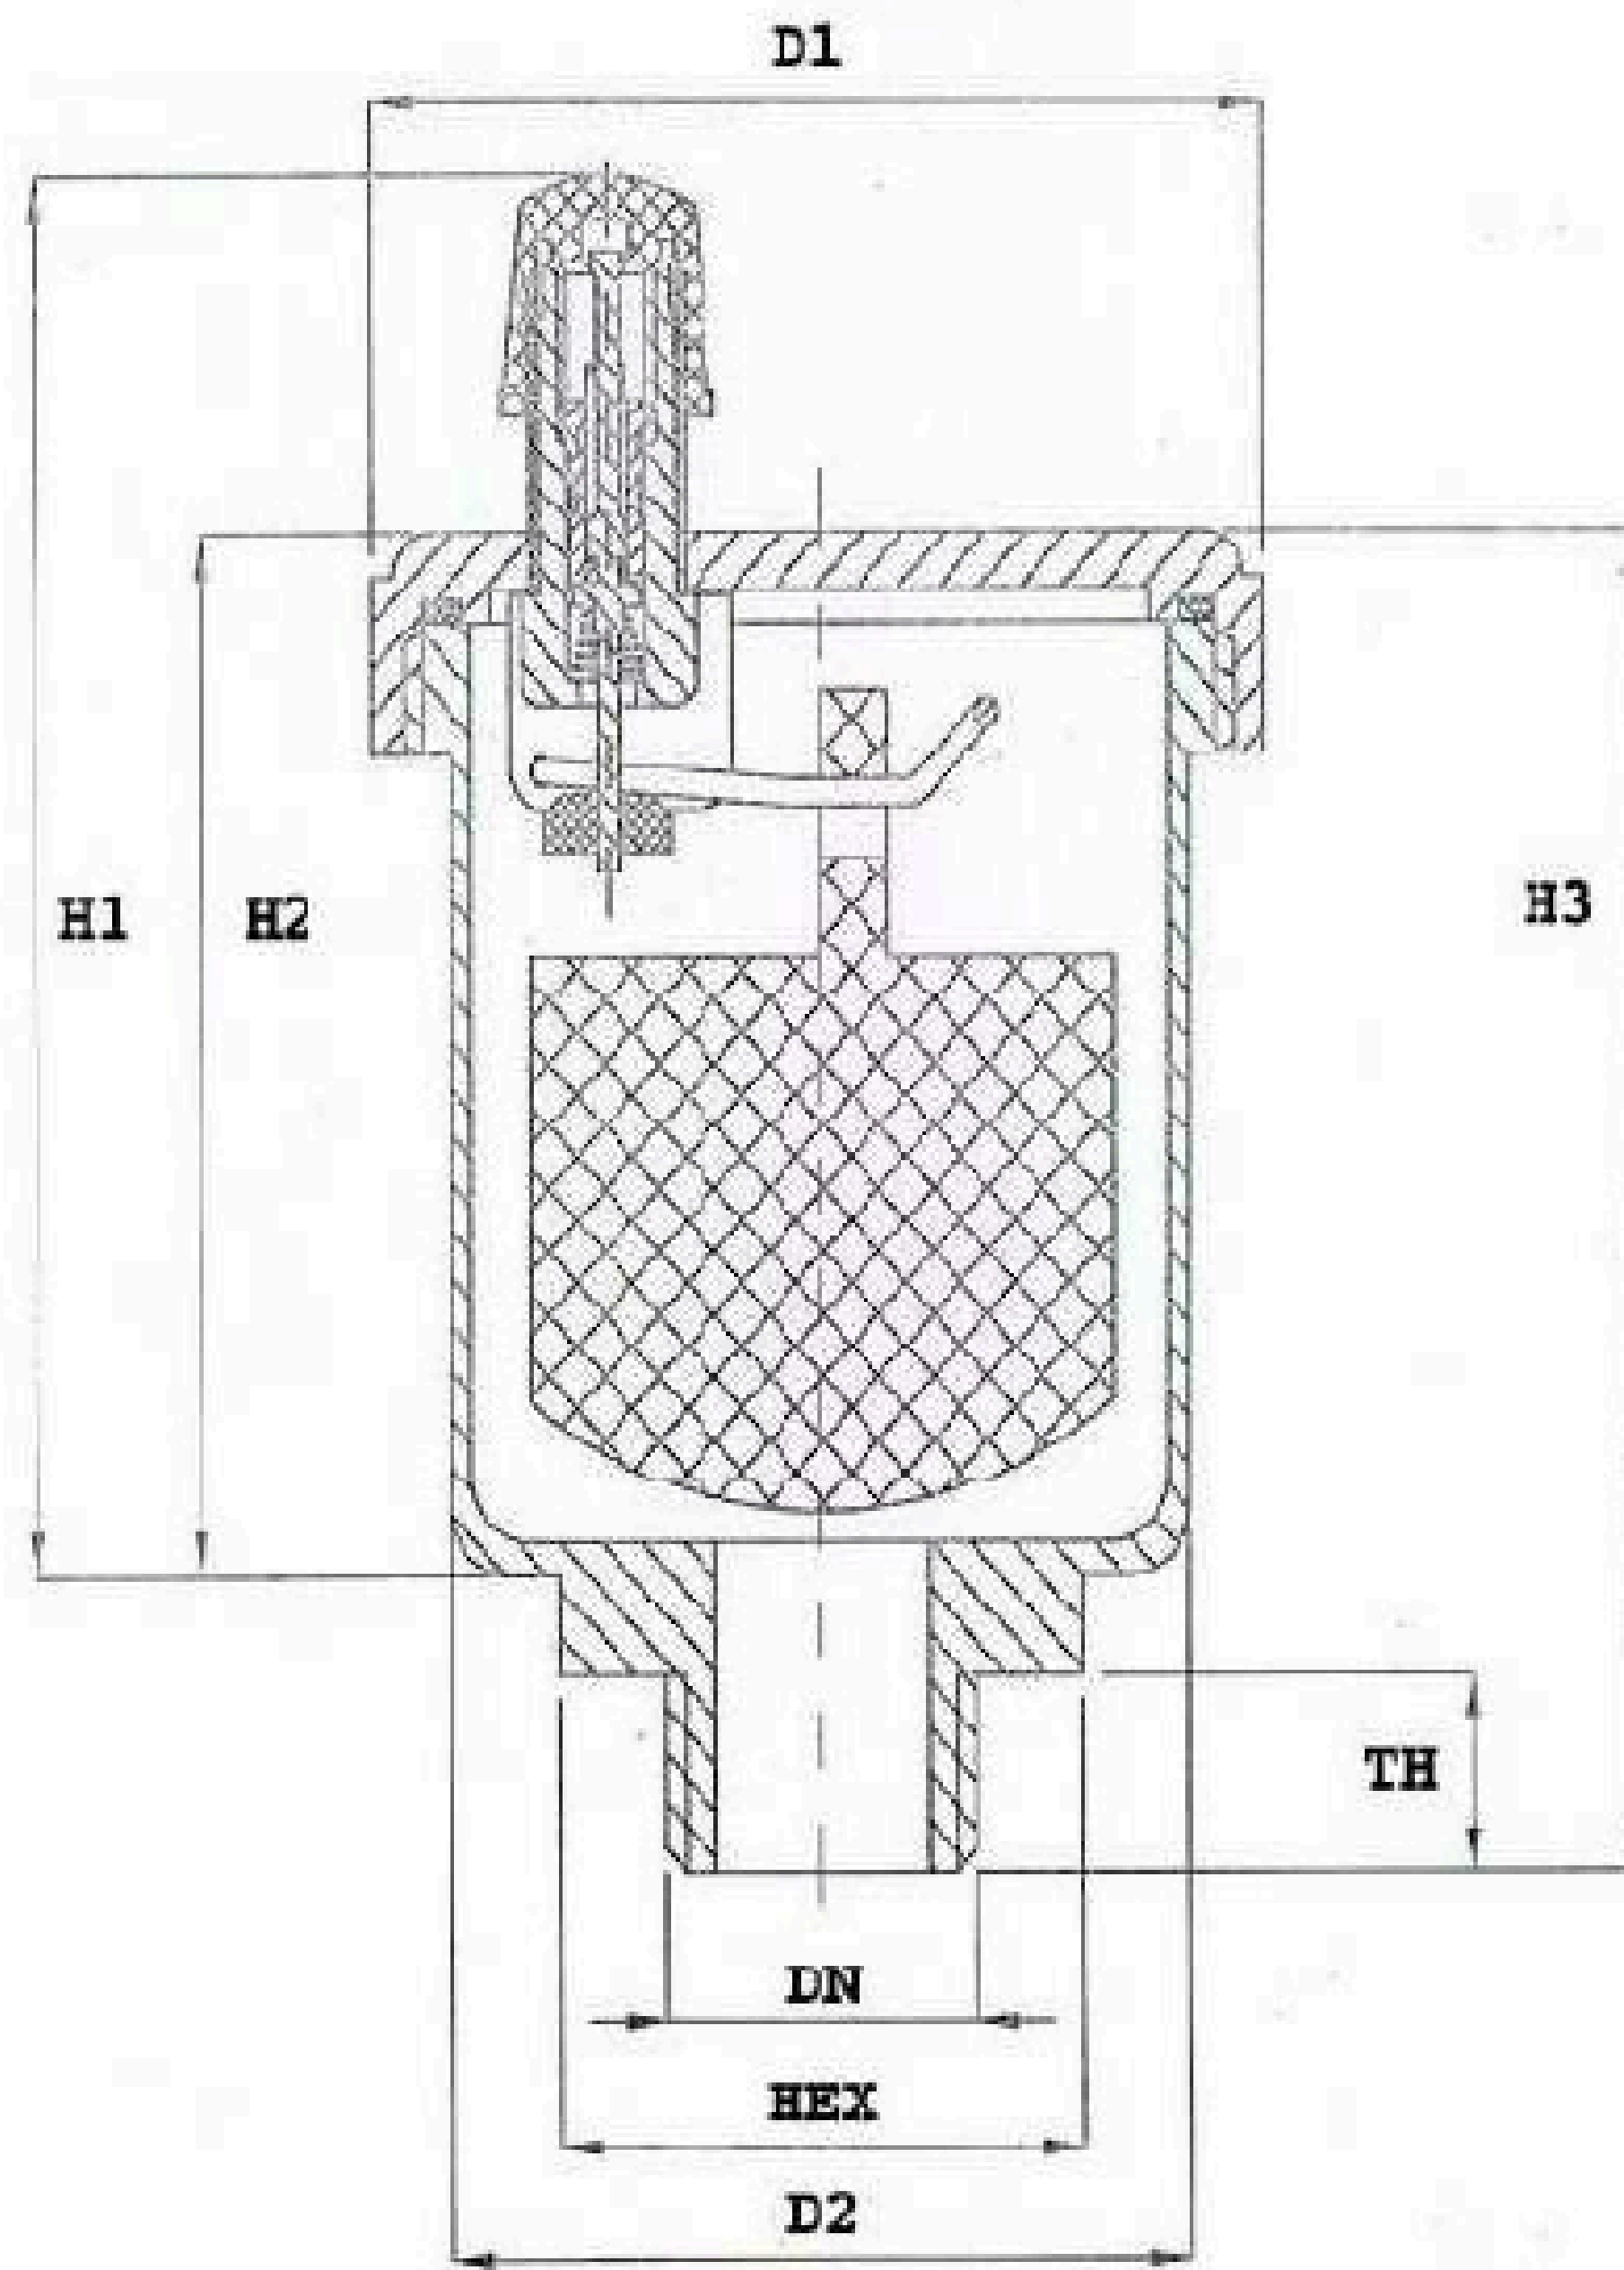

ITEM	DN	HEX	D1	D2	H1	H2	H3	TH
SKS 200	3/8"	23	45.90	30	62.5	44.7	60.58	6.5
SKS 200	1/2"	27	46	38	62.5	44.7	60.58	7.99
SKS 200	3/4"	30	50.40	41.30	82.5	70.9	85	10.10
SKS 200	1"	34	50.60	41.39	87.10	72.30	87	10.10

SKS
VALVES

CLIENT		
P.O./ENQ. NO.		
TITLE :		AUTOMATIC AIR VENT
MODEL :		SKS 200
		SCALE N.T.S
		SHEET 1 OF 1